



DC Sports
13000 Temple Ave
City of Industry CA, 91746
T. 626-937-6988
www.dcsports.com

SCS4202

EXHAUST SYSTEM INSTALLATION INSTRUCTIONS 09-20 Nissan 370Z (NON NISMO)

!!! READ ALL INSTRUCTION THOROUGHLY BEFORE BEGINNING INSTALLATION. FAILURE TO DO SO MAY RESULT IN COSTLY ENGINE AND/OR SYSTEM DAMAGE!!!

*****IF UNSURE ABOUT SYSTEM INSTALLATION PLEASE HAVE A REPUTABLE PERFORMANCE SHOP OR A LICENCED MECHANIC INSTALL THIS SYSTEM*****

*****FOR YOUR SAFETY, ALLOW ENGINE TO COOL FOR AT LEAST AN HOUR BEFORE BEGINNING INSTALLATION*****

*****PLEASE CHECK AND MAKE SURE ALL HARDWARE IS PRESENT BEFORE INSTALLATION. PARTS LIST ON LAST PAGE*****

TOOLS REQUIRED

3/8 Socket Wrench
14mm Socket
12mm Socket
Exhaust hanger removal tool
Jack
Jack Stands

REMOVAL OF STOCK EXHAUST AND INSTALLATION OF EXHAUST SYSTEM

1. Utilizing a flat work area (preferably on concrete), jack up the car and **support the car on jack stands** under the frame support points. (Refer to your owner's manual) **DO NOT USE THE JACK TO SUPPORT THE CAR WHILE WORKING UNDERNEATH!**
2. Remove the four nuts holding the muffler piece to the mid pipes.
3. Using an exhaust hanger removal tool remove the 3 rubber hangers holding the muffler piece to the car.
4. Remove the 2 nuts holding the mid pipe to the y pipe.
5. Use the exhaust hanger removal tool to remove the 2-rubber hangers holding the mid pipes to the car.
6. Install DC Sports mid pipe onto y pipe. Make sure to use provided gasket. Hand tighten the nuts to the y pipe studs.
7. Install the muffler rubber hanger onto the DC sports muffler piece.
8. Slide exhaust clamp onto the end of the mid pipe.
9. Install muffler piece onto car by inserting rubber hanger onto car's hanger and making sure the exhaust pipe slips into the mid pipe.
10. Insert rubber hanger onto the DC Sports mid pipe and tighten the nuts from the mid pipe to the y pipe.
11. Make sure mid pipe or muffler piece do not rub on anything and tighten down exhaust clamp.
12. **RECHECK ALL YOUR WORK. If exhaust system looks off loosen clamps and adjust. Tighten clamps back down afterward.**
13. Lower the car off the jack stands and start the engine and check for exhaust leaks.
14. After approximately 500 miles (800km) re-check the exhaust system bolts and nuts and tighten as necessary.

*****LIMITED 1 YEAR WARRANTY*****

DC Sports only warranty's exhaust systems due to poor workmanship. We do not cover normal wear and tear damages due to misuse or abuse.


Warranty covers the original owner of intake system by having proof of purchase.
We have the right to void all warranty if you cannot provide the information needed by DC Sports.
DC Sports does not cover any cost for installation or removal of products.

*****WARRANTY CLAIMS*****

All warranty claims must be shipped prepaid by the customer to DC Sports.
Warranty claims must have an RMA (Return Merchandise Authorization) number on the box or package will be refused and sent back to the shipper.

PARTS LIST

Quantity	Part number	Part Description
1	<i>SCS4202</i>	<i>Single Canister Exhaust System (two pieces)</i>
1	<i>DCECL-300</i>	<i>3" Exhaust Band Clamp</i>
1	<i>RM-CB62</i>	<i>3" Two Bolt High temp gasket</i>
1	<i>DCDECAL</i>	<i>DC Decal (two pieces)</i>
1	<i>DC-LPFRAME</i>	<i>DC SPORTS license plate frame</i>

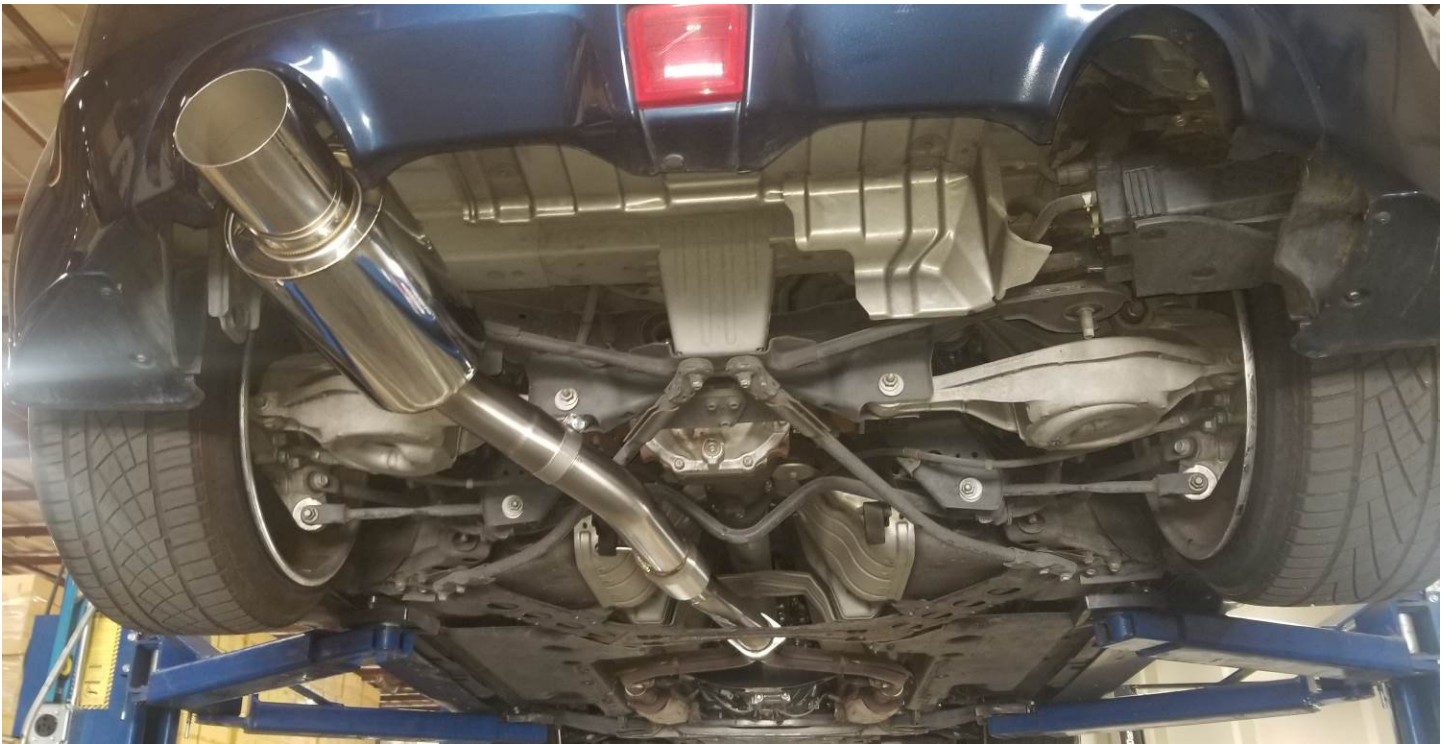

THANK YOU FOR CHOOSING DC SPORTS